

PRODUCT SPECIFICATIONS SHEET

Model: Victory Twin Series - Victory Twin (SC712)

Manufacturer: Pride Mobility Products Company

Internet Address: www.pridemobility.com

Document Information: INFINF2547/Rev A/December 2011

Model Number	SC712
Maximum Obstacle Climbing Ability	5 cm (2 in.)
Maximum Allowable Incline	14.1% (8°)
Maximum Angle Capacity	17.6% (10°)
Overall Length²	116.8 cm (46 in.)
Overall Width²	56.6 cm (22.3 in.)
Total Weight Without Batteries⁶	68.27 kg (150.5 lbs.)
Heaviest Piece When Disassembled	Front Section: 25 kg (55 lbs.)
Turning Radius²	106.7 cm (42 in.)
Speed (maximum)¹	Variable up to 9.2 km/h (5.7 mph)
Range Per Charge^{1, 4}	17.85 km (11.1 miles)
Ground Clearance²	5.7 cm (2.25 in.) at motor
Weight Capacity	158.75 kg (350 lbs.)
Standard Seating	Type: Foldable Molded Plastic with Sliders Weight: 12.5 kg (27.5 lbs.) Material: Black Vinyl Dimensions: 45.72 cm (18 in.) width; 43.18 cm (17 in.) depth
Drive System	Rear-wheel drive, sealed transaxle, 24 volt DC motor
Dual Braking System	Regenerative and electromechanical
Tires	Front: 23 cm (9 in.) solid Rear: 25.4 cm (10 in.) solid
Battery Requirements^{3, 5}	Type: Two 12-volt, deep-cycle Size: U-1 (31-36 Ah) or optional 40 Ah U-1 Battery Weight: 11 kg (24.5 lbs.) each 40 Ah Battery Weight: 14.74 kg (32.5 lbs.) each
Battery Charger	Off-board charger

¹ Varies with user weight, terrain type, battery amp-hour rating (Ah), battery charge, battery condition, tire type and tire condition. This specification is subject to a variance of +10%, -5%.

² Due to manufacturing tolerances and continual product improvement, this specification can be subject to a variance of (+ or -) 3%.

³ AGM or Gel-Cell type required. See IV. "Batteries and Charging."

⁴ Tested in accordance with ANSI/RESNA, WC Vol 2, Section 4 & ISO 7176-4 standards. Results derived from theoretical calculation based on battery specifications and drive system performance. Test conducted at maximum weight capacity.

⁵ Battery weight may vary based on manufacturer.

⁶ Includes standard seat.

NOTE: This product conforms to all applicable ANSI-RESNA testing requirements and ISO 7176 series EN12184 standards. All specifications subject to change without notice.

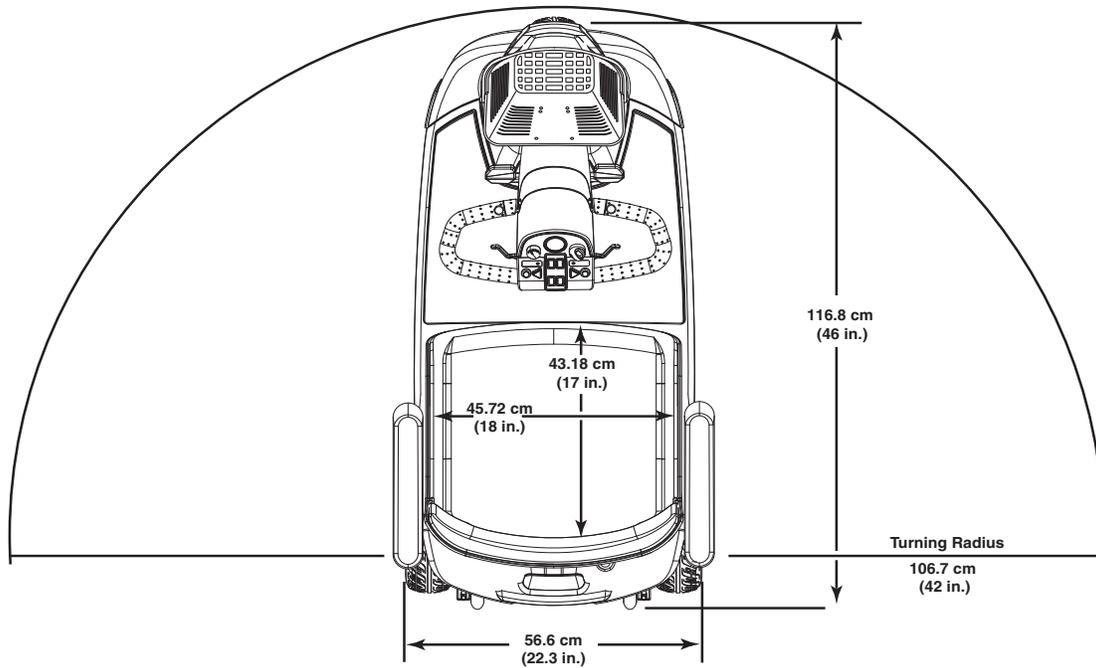
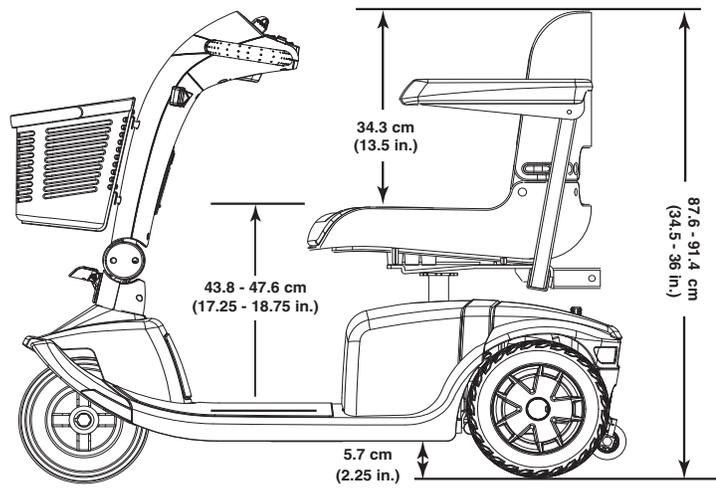


Figure 1. Scooter Dimensions (Victory Twin)

* I N F I N F B 2 5 4 7 *

PRODUCT SPECIFICATIONS SHEET

Model: Victory Twin Series - Victory Twin DX (SC712DX)

Manufacturer: Pride Mobility Products Company

Internet Address: www.pridemobility.com

Document Information: INFINFB2547/Rev A/December 2011

Model Number	SC712DX
Maximum Obstacle Climbing Ability	5 cm (2 in.)
Maximum Allowable Incline	14.1% (8°)
Maximum Angle Capacity	17.6% (10°)
Overall Length²	116.2 cm (45.75 in.)
Overall Width²	57.1cm (22.5 in.)
Total Weight Without Batteries⁶	62.5 kg (138 lbs.)
Heaviest Piece When Disassembled	Front Section: 27.2 kg (60 lbs.)
Turning Radius²	108.6 cm (42.75 in.)
Speed (maximum)¹	Variable up to 10.5 km/h (6.5 mph)
Range Per Charge^{1, 4}	Up to 20 km (12.5 miles)
Ground Clearance²	5.7 cm (2.25 in.) at motor
Weight Capacity	158.75 kg (350 lbs.)
Standard Seating	Type: Foldable Molded Plastic with Sliders Weight: 12.5 kg (27.5 lbs.) Material: Black Vinyl Dimensions: 45.72 cm (18 in.) width; 43.18 cm (17 in.) depth
Drive System	Rear-wheel drive, sealed transaxle, 24 volt DC motor
Dual Braking System	Regenerative and electromechanical
Tires	Front: 23 cm (9 in.) solid Rear: 25.4 cm (10 in.) pneumatic
Battery Requirements^{3, 5}	Type: Two 12-volt, deep-cycle Size: U-1 (31-36 Ah) or optional 40 Ah U-1 Battery Weight: 11 kg (24.5 lbs.) each 40 Ah Battery Weight: 14.74 kg (32.5 lbs.) each
Battery Charger	Off-board charger

¹ Varies with user weight, terrain type, battery amp-hour rating (Ah), battery charge, battery condition, tire type and tire condition. This specification is subject to a variance of +10%, -5%.

² Due to manufacturing tolerances and continual product improvement, this specification can be subject to a variance of (+ or -) 3%.

³ AGM or Gel-Cell type required. See IV. "Batteries and Charging."

⁴ Tested in accordance with ANSI/RESNA, WC Vol 2, Section 4 & ISO 7176-4 standards. Results derived from theoretical calculation based on battery specifications and drive system performance. Test conducted at maximum weight capacity.

⁵ Battery weight may vary based on manufacturer.

⁶ Includes standard seat.

NOTE: This product conforms to all applicable ANSI-RESNA testing requirements and ISO 7176 series EN12184 standards. All specifications subject to change without notice.

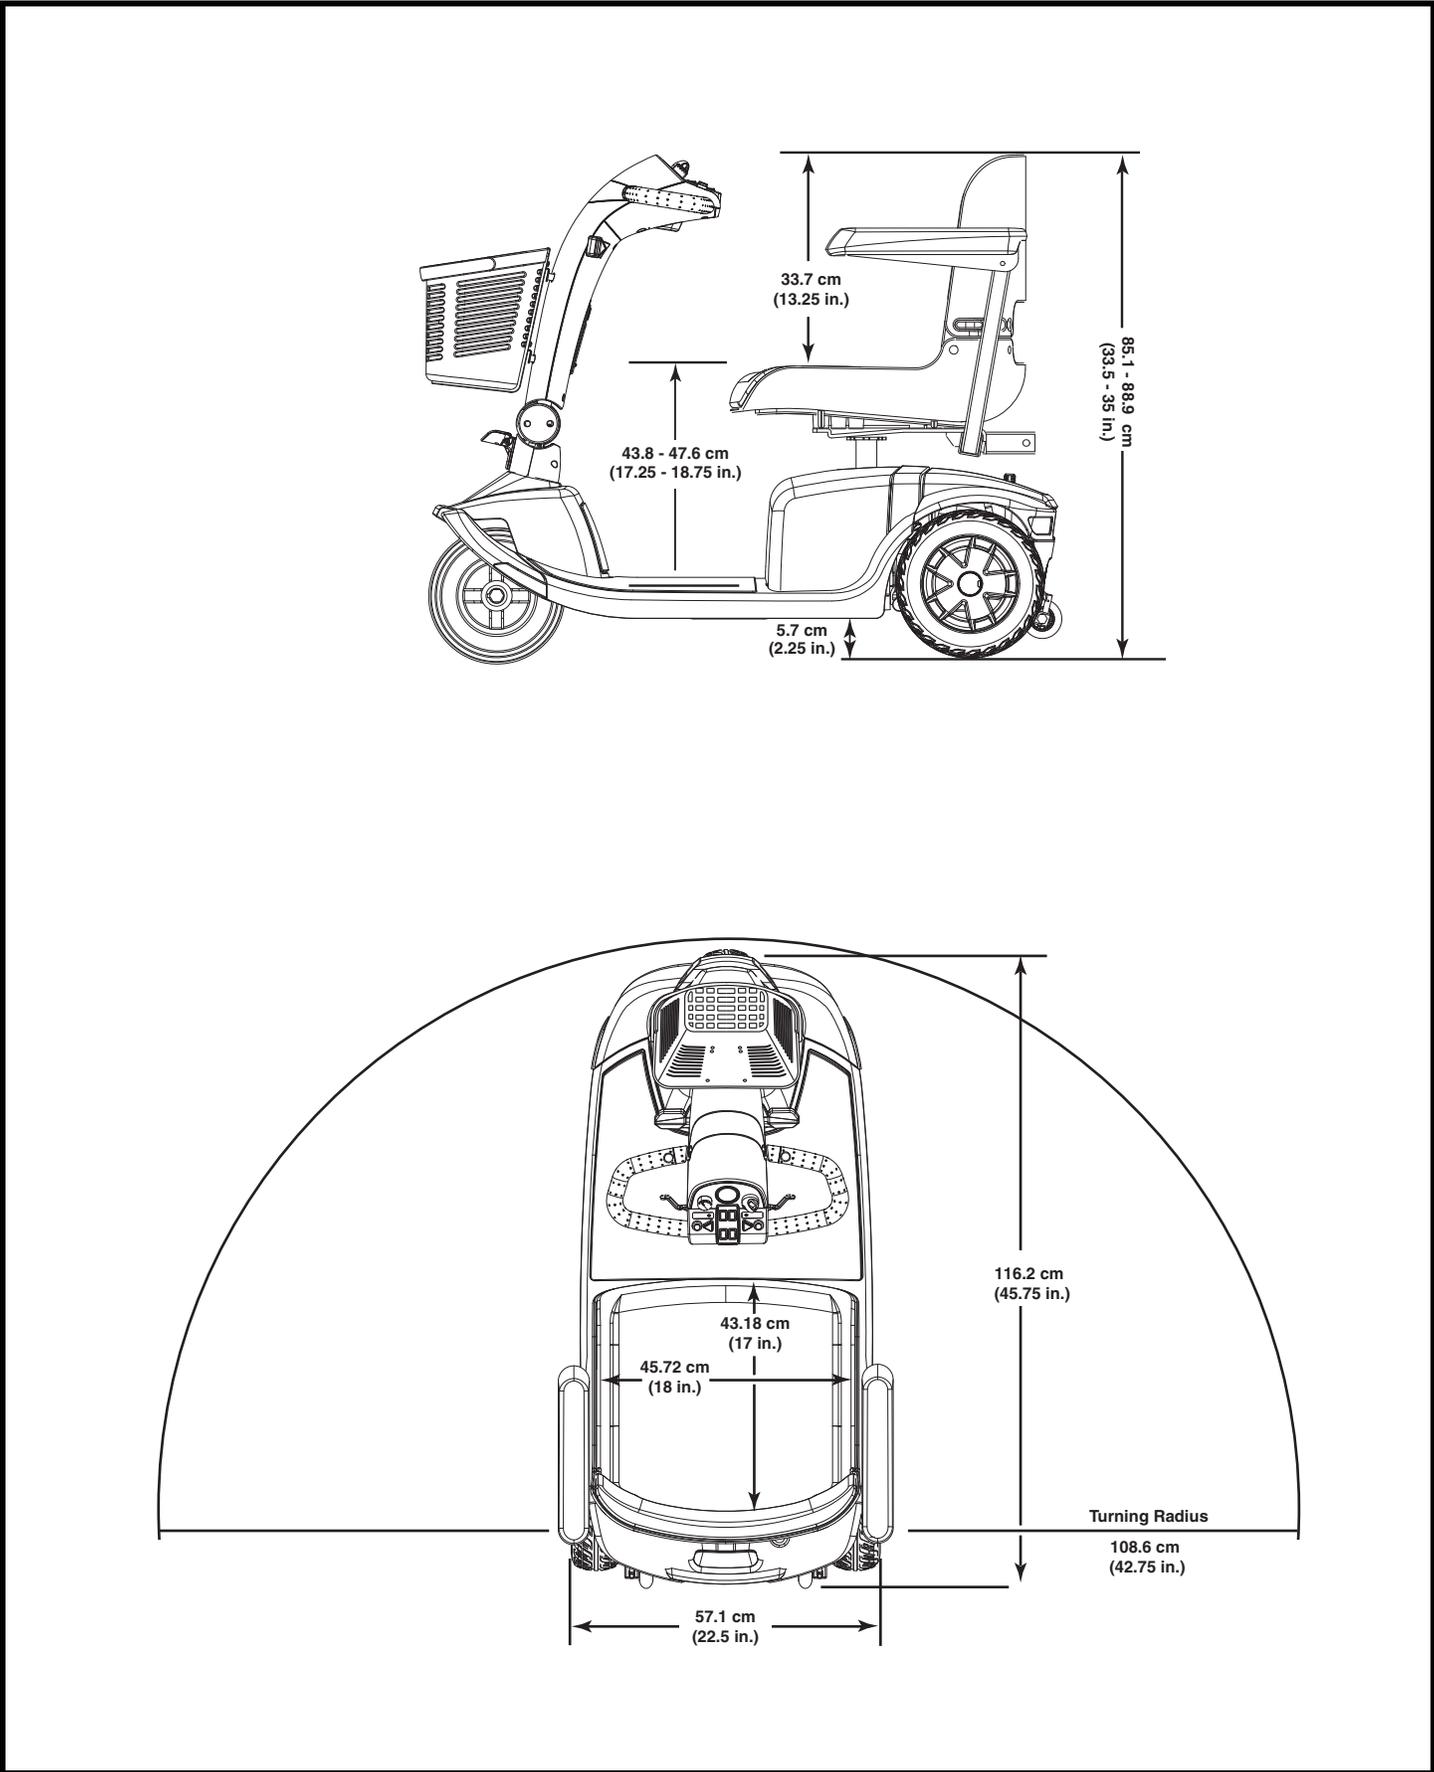


Figure 2. Scooter Dimensions (Victory Twin DX)